




Polycarbonate Green Combination Units Specification

Features

- Completely self-contained
- Fully Automatic Operation
- Universal mounting canopy for top installation
- Energy consumption of less than 2 watts for red letters and less than 1 watt for green
- Compact, low profile design in neutral finish
- LED lamp life of up to 25 years
- Push to test switch
- 6-Volt pure lead, maintenance-free battery
- Environmentally-coated, solid state charger
- Automatic, low voltage disconnect (LVD)
- Universal transformer for 120 or 277VAC operation
- All units damp location listed operating temperature range of 40°C, (104°F) to -15°C (5°F)
- Standard with two fully adjustable, glare-free lighting heads
- Injection-molded, V-O flame retardant, high impact, thermoplastic housing
- Charge rate/power on LED indicator light
- All units are battery back up and include an extra battery to run up to 12w of remote heads



Dimensions

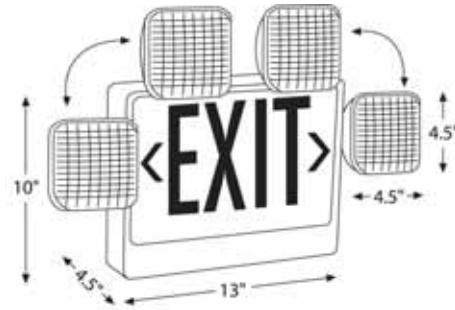

Ordering Information

Catalog Model #	Description	LED	Housing
20785	2 Headed Adjustable Exit/Emergency Combo GRN Letters with WH Housing	Green	White
20795	2 Headed Adjustable Exit/Emergency Combo GRN Letters BLK Housing	Green	Black
20787	2 Headed Adjustable "Bug Eye" Exit/Emergency Combo GRN Letters WH Housing	Green	White
20787BLK	2 Headed Adjustable "Bug Eye" Exit/Emergency Combo GRN Letters BLK Housing	Green	Black

Accessories

Item #	Description
207LWG	Large Wire Guard for Combo Units
207R1	Single WH Remote Head 6W 6V
207R2	Double WH Remote Head 6W 6V
207R3	Single Grey Remote Waterproof Head 5.4W 6V
207R4	Double Grey Remote Waterproof Head 2 X 5.4W 6V
207RT	Hand Held Remote Test Unit
20734	Replacement Battery 6V 4.5Ah