


Features

- Completely self-contained
- Fully Automatic Operation
- Compact, low profile design in a neutral finish
- Push to test switch
- Automatic, low voltage disconnect (LVD)
- 120 or 277 VAC operation
- Injection-molded, V-O flame retardant, high impact, thermoplastic housing
- Charge rate/power on LED indicator light
- Energy consumption of less than 4 watts for red letters and less than 2 watts for green letters
- LED lamp life of up to 25 years
- Listed for damp location
- Universal mounting canopy for top or side installation
- Maintenance-free battery provides an estimated service life of 10 years with an operating temperature range of -4°F (-20°C) to 113°F (45°C)
- 5 year battery warranty
- Battery Run time of a minimum of 90 minutes
- Power Factor of >.95
- All Products listed to UL 924 and meet NFPA Life Safety code 101



Dimensions

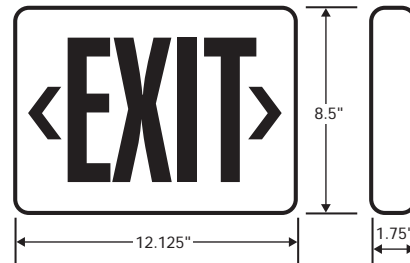

Ordering Information

Catalog Model #	Descriptions	LED Color	Housing Color	AC/BBUP
20742D	Red LED Exit Sign Universal AC Only WH Housing	Red	White	AC
20743D	Red LED Exit Sign Universal Battery Backup WH Housing	Red	White	BBUP
20743DBLK	Red LED Exit Sign Universal Battery Backup BLK Housing	Red	Black	BBUP
20744D	Green LED Exit Sign Universal AC Only WH Housing	Green	White	AC
20745D	Green LED Exit Sign Universal Battery Backup WH Housing	Green	White	BBUP
20745DBLK	Green LED Exit Sign Universal Battery Backup BLK Housing	Green	Black	BBUP
20746D	Red LED Exit Sign Universal AC Only BLK Housing	Red	Black	AC
20748D	Green LED Exit Sign Universal AC Only BLK Housing	Green	Black	AC

Accessories

Item #	Description	Mol (inches)	Width (inches)	Depth (inches)	VAC
207WG	Wire Guard for Exit Sign	13.5"	15"	6"	120/277
207WGW	WH Wire Guard for Exit Sign	12"	14.25"	3.25"	120/277
207PS	Polycarbonate Shield for Exit Sign	15"	22"	8"	120/277
20726	Exit Sign Battery Replacement GP2800 - RD	4"	0.6"	-	120/277
20736	Exit Sign Battery Replacement GP3800 - GR	8"	0.6"	-	120/277
20730	Exit Sign Battery Replacement 4.8V 650mAh	4"	1.1"	0.6"	120/277

